




Desktop Heavy Duty Handset

Product Code: A/DHDH / DHDH

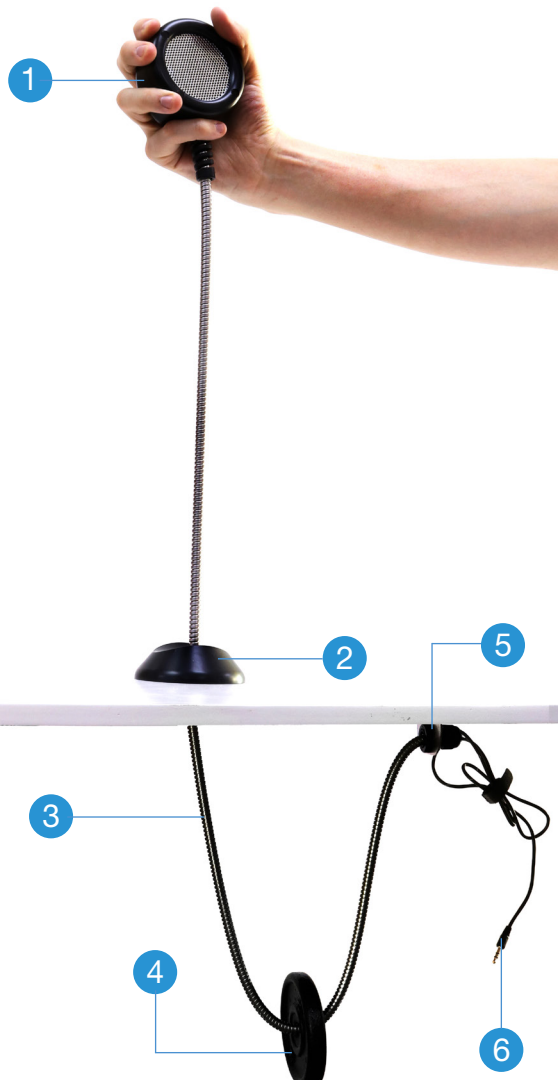

- 1 Heavy Duty Handset**
Combining simple design with high-grade, impact-resistant plastic to produce an extremely rugged handset, ideal for busy visitor attractions and public spaces. It boasts a superb quality speaker, which offers great dynamic range, and is able to reproduce music of high clarity or narrative text clearly for the listener.

- 2 Desktop Mount**
Easily installed onto a flat surface, the desktop mount is designed specifically for the Heavy Duty Handset.

- 3 Armoured Cable**
The audio cable is protected by a 1.35m silver stainless steel armoured conduit cable. With a heavy duty strain relief offering further protection.

- 4 Support Weight**
The Armoured Cable is counterbalanced by a 0.5Kg weight that retracts it after use.

- 5 Anchor Bracket**
Allows you to adjust the hang length of the Armoured Cable.

- 6 3.5mm Jack**
Simply connect to your audio playback device via the 3.5mm jack.

- ✓ Material**
Constructed from high grade impact resistant plastic.


Options

- ✓ Standard**
Operates like any other Handset.

- ✓ AutoPlay**
Content is triggered upon pickup and playback stops when replaced (Requires a compatible device such as our SoundClip range of audio players).

- ✓ Optional Branding Labels**
Customise your handset with optional branding labels.

Installation Guide / Technical Information

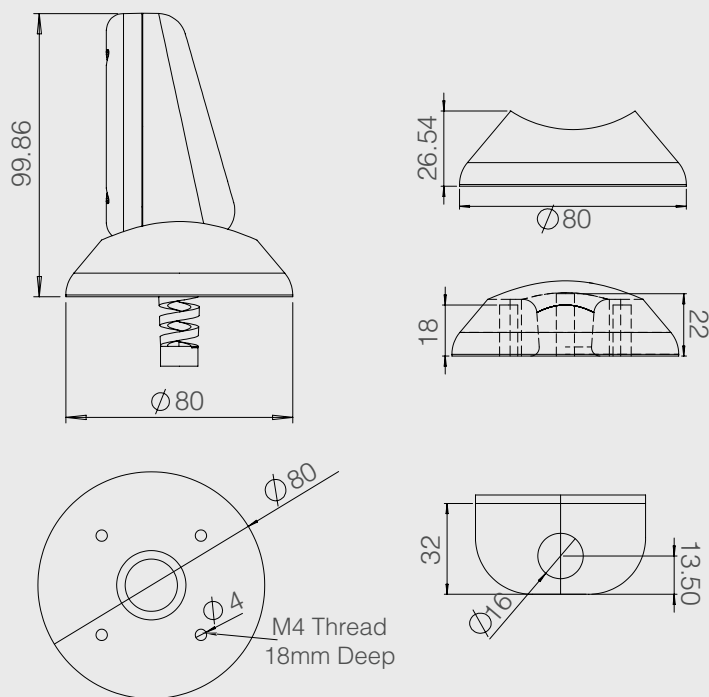

Fitting Holes

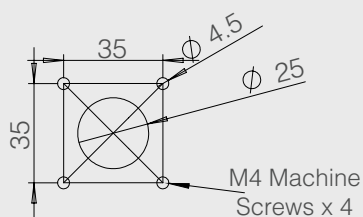


Fig 1




Fig 2

(drawings not to scale)

Package Weight	525g
Package Dimensions	180 x 160 x 80mm
Nominal Impedance	100Ω
Frequency Range	50Hz - 20KHz
Sound Pressure Level	123 dB
Input Power (W)	Rated: 30mW - Max: 50mW
Input Power (V)	Rated: 1.7V - Max: 2.25V
Colour	Silver
Armoured Cable Length	1350mm
3.5mm Cable Length (from Bracket)	500mm (+/- 10mm)
Screw Sizes	Wood Screws (Driver bit No.2, 3.5 x 30mm), Machine Screws (M4 x 30mm)
Operating Temperature	-25°C to 60°C
Hearing Aid Compatible	ADA/DDA
Included	1 x Heavy Duty Handset, 1 x Desktop Mount, 4 x Wood Screws, 4 x Machine Screws, 1 x Gland Plastic, 1 x 0.5Kg Weight & 1 x L Anchor Bracket.

Installation Guide

1. Choose a suitable flat surface to mount the unit.
2. Drill a 25mm diameter hole through the desk in the position decided above.
3. Drill four holes of 4.5mm diameter in a square pattern at 35mm centres and mount the handset base using M4 machine screws (**Fig 1**).
4. Choose a suitable location under the desk to mount the angle bracket ensuring that the cable between the handset mount and the angle bracket is allowed to move freely and will not encounter any obstructions. The weight must not touch the ground when the handset is stored on the mount.
5. Attach the angle bracket to the underside of the desk using suitable fixings (**Fig 2**).
6. Thread the armoured cable through the handset mount then thread through the centre of the counterbalance weight.
7. Attach the plastic gland to the end of the armoured cable and secure to the angle bracket.
8. Test the operation of the handset to ensure all parts are moving freely and not obstructed in any way.

Related Products



Heavy Duty Handset



SoundClip-2



MKII Armour Cable Headphones



VideoClip HD-8