

AutoPlay DoubleCup

Manual v2



Jan 2017

Contents

1. What is the AP-DC?.....	4
2. Connecting to SoundClip	5
3. Connecting to your own device	6
4. Installation	7

Thank you for purchasing the AutoPlay Double Cup headphones

The AP-DC is one of a range of products we offer specific to the heritage marketplace. We are confident that we have other products you will find useful and look forward to hearing from you again soon.

T: +44 (0)1639 767007 | **W:** www.blackboxav.co.uk

1. What is the AP-DC?

The AutoPlay Double Cup headphone is an easily installed headphone system which allows content to be played upon 'pickup' of the headphones.

The Headphone is supplied with a unique hanger, when removed from this hanger content is triggered.




2. Connecting to SoundClip

Connecting the AP-DC to our range of SoundClip audio players couldn't be easier.

The Hanger is responsible for activating content and must be connected to the SoundClip like so;

1. Simply plug the activation wires (black/yellow wires attached to the green terminal block) into button 1.
2. Plug the power terminal (red) into the 12 V Out.
3. Now connect headphones by plugging them into the the audio jack.
4. Then set the configuration dipswitch to 5 in the 'on' (down) position.

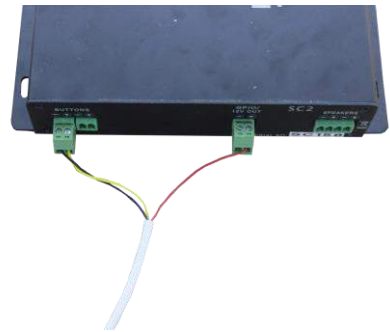


See individual SoundClip user manual for information on programming content to be activated. Essentially the handset will now play content programmed to activate upon trigger of Button 1.



3. Connecting to your own device

For use with your own device the hanger is supplied with 5 bare-end cables;

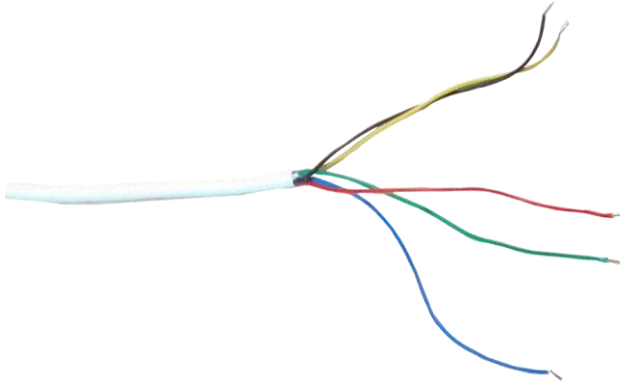

Although designed primarily to be utilised alongside our own range of media players, the AP-DC can be connected to a device of your own (we recommend you check compatibility with us) - to do so you must be aware of the following cable connections;

BLACK = Ground - Connect to controller

Depending on how unit triggers;

YELLOW = Trigger - contact is n/c

GREEN = Trigger - contact is n/o

Depending on how much power required;

RED = Power - 12v power consumption rated @ 50 milliamps

BLUE = Power - 5v Supply consumption rated @ 50 milliamps

Do not use 12v down a 5v line


4. Installation

The hanger needs to be mounted flush to a surface to allow the headphones to sit securely - the headphone icon displayed on the hanger should be installed right way up.

All headphones are supplied with a 90° knuckle which provides additional stability to the armoured cable via it's through panel installation point.

A cutout for the knuckle will need to be made to the following measurements (in mm).

This secures the otherwise weak point should the cable simply be fed through a panel.

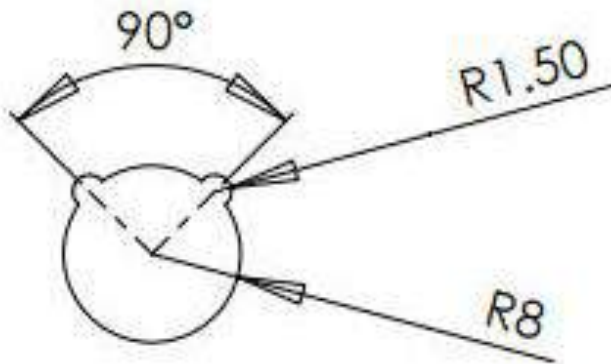

Not to scale

For additional help please contact us:

www.blackboxav.co.uk/support

Tel: +44 (0)1639 874 100

Email: sales@blackboxav.co.uk