



10" Exhibit Loop Tablet

Manual

V1.1

Contents

Safety Guide 4

Your Exhibit Loop Tablet 5

Setting Up 6

Overview..... 6

Android Navigation Buttons..... 7

WiFi Connection 8

Remote Control 9

Fitting Options 10

Technical Information 13

Technical Drawings..... 14

Safety Guide

Please observe the following when installing this device.

Warning

- This product is not designed to be resistant to moisture or excessive dirt/dust. When deciding on a suitable installation point ensure there is reasonable protection from environmental damage.
- If there is damage to the power supply in any way, arrange for a replacement unit by contacting blackbox-av. They may require you to send the defective power unit back so in this case do not dispose of the power supply unless prompted to do so. If you wish to source your own power supply a CE or FC certified double insulated and regulated supply is required. The Power supply has an output rating of 12vDC at 2A, 24W. Using a power supply with a higher voltage will irreparably damage the display unit.
- Please keep the device away from excess temperature (40°C above), cold (-5°C below) or wet locations. Do not place the unit in direct sunlight for prolonged periods as this may cause the product to overheat.
- For disposal of old electrical equipment please follow the guidelines associated with your country/territory or ship the unit back to blackbox-av and we will dispose/recycle the unit. The symbol on the left indicates that this product shall not be treated as household waste. Instead it shall be handed to applicable collection points for the recycling of electronic equipment. If you dispose of this unit correctly you will be helping prevent future harm to the environment which is caused by poor waste management of this type of equipment.

If the screen has been damaged take extra care to prevent the LCD liquid from leaking out of the unit and wrap in a strong plastic bag with no holes.

Precautions of Use

- Whilst the unit is connected to a mains outlet and the power is switched on it is providing energy for operating the device. If the unit is not being used for long periods of time it is recommended to turn off the power as it will prolong the life of its electronic circuitry.
- Arrange cables so that they do not become a trip hazard for people/pets.
- Do not place heavy or sharp objects on the LCD panel.

Your Exhibit Loop Tablet

In the box

1. Exhibit Loop Tablet
2. 1 x Remote Control
3. Screw-in Screen Stand
4. Power Cable
5. User Manual
6. Mount (Optional)
7. Security Case

Exhibit Loop Tablet



The Tablet uses capacitive touch technology with a 10.1" IPS Panel. With a High Definition resolution of 1280 x 800 high specs and in-built android OS, the tablet is ideal for running android applications.

Power Input


The tablet is completely powered by mains. The screen will turn on when the power is connected and turns off when power is disconnected.

It's important to leave the tablet for 1 minute after powering down, before powering back up.

The power cable (supplied) and audio cables (not supplied) can be secured in place behind the security casing.

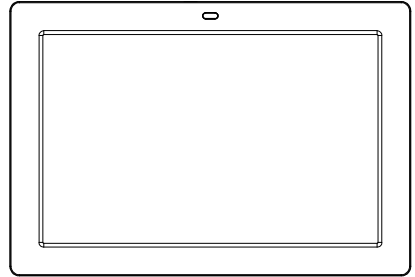

Setting Up

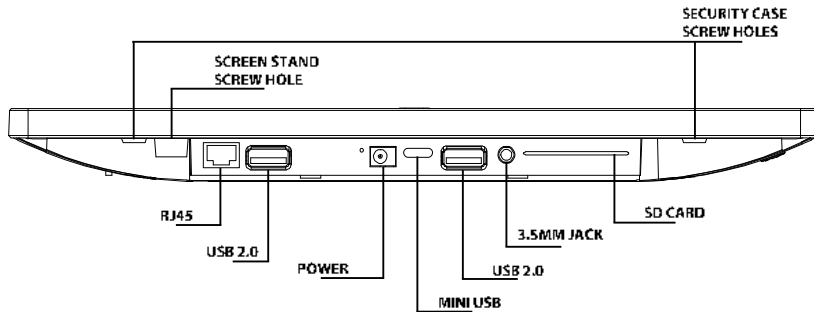

Overview

Security Case

Secure inputs behind the supplied security cover. Simply screw on the cover to avoid public interference. See page 11.

Screw-in Screen Stand

The supplied Screen Stand can be used to prop your Tablet up on a flat surface. Note that the stand cannot be used whilst the security cover is fitted.

USB Connections

The Tablet offers 3 USB connections; 2 x USB2.0 and 1 x Mini USB

SD Card

The SD Card slot supports cards up to 32GB (not supplied).

3.5mm Jack

Connect headphones or other output devices via the 3.5mm jack.

RJ45

If you require wired internet access, simply connect an ethernet cable to the onboard port.

Android Navigation Buttons


Enabling / Disabling Navigation Buttons

Note: Ensure Remote is working before enabling this setting.

If you wish to hide the android navigation bar, you will need to follow these steps. This is an important setting to lock users into one application.

1. Home Screen

First head to your home screen and select the settings icon at the bottom of the screen.

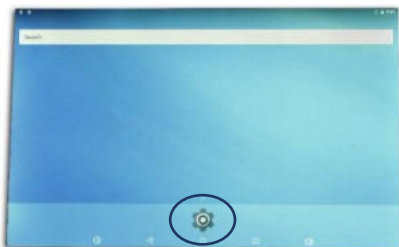


2. Accessibility

Scroll down to the Accessibility tab settings.



3. Hiding the Statusbar

Within the Accessibility tab, scroll down to the "Hide the Statusbar" setting.



4. Activating the Setting

Press the button on the right side of the page to activate the setting.



5. Enabling Navigation

As you can see the navigation bar is now hidden and navigation will need to be performed utilising the supplied remote.



WiFi Connection

If you wish to connect Tablet to the WiFi, follow the steps below:


1. Settings

Select settings icon.



4. Connect to WiFi

Select your WiFi and enter the password.

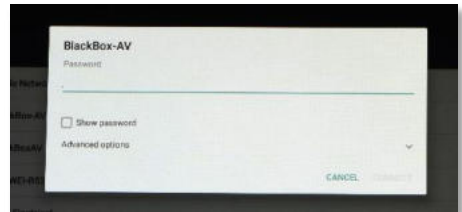

2. Selecting WiFi Setting

Once in the settings, select the WiFi option.



3. Turning on WiFi

Turn your WiFi on by selecting the top right button.



Remote Control

Point the remote at the IR receiver to the right of the Tablet.



Sleep Mode

Pressing this button will put the screen into sleep mode to turn on / off you should power the unit up/down via the mains.

Home Button

Pressing the Home Button will take you to the home screen. This is where your application icons are usually stored.

Volume

You may adjust the volume level via the remote control, however you can also change this in the settings > sound options. The set volume will be saved and will stay like this even after powering on/off.

Back Button


Selecting the Back Button will navigate you to the previous screen.

Fitting Options

Security Casing

To fit your security case on the rear of the tablet, you first need to make sure the screw-in screen stand has been taken off.


1. Connect the inputs / outputs then thread any wires through the open slots below the casing.
2. Safely slide the case into position above the screw holes.
3. Next place both thumb screws into the screw holes.
4. Securely fit the screws into place.

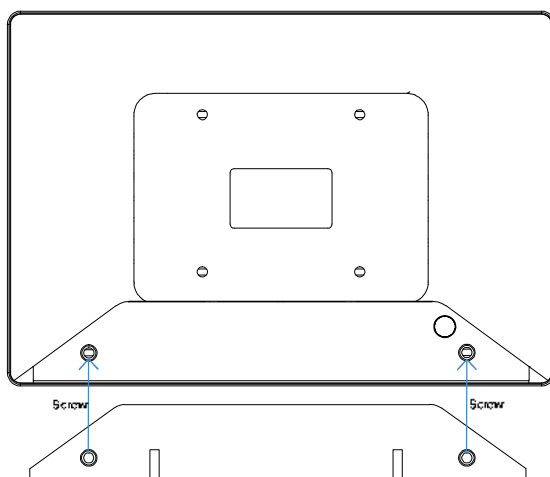

Tilt Mount


If you purchased the Tablet with the Tilt Mount, you will receive the mount as one piece. To fit to the Tablet, follow the steps below:

1. Separating the Mount

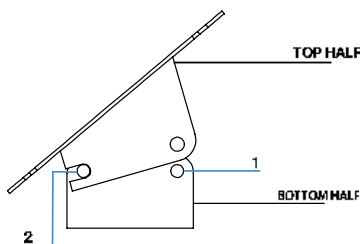


1. Undo and remove both rear screws from the mount.
2. Slightly loosen both front screws (**but do not remove**) and gently slide out the bottom half of the mount.

3. Fitting to the Tablet

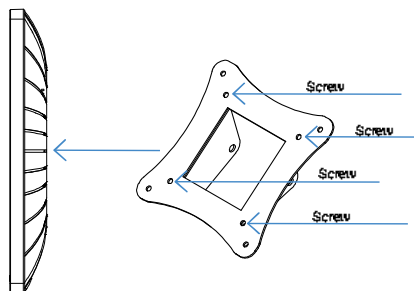


Place 4 screws through the top half of the mount and fit this onto the Tablet.

2. Mount to your Surface



You will now need to fit the bottom half of the mount onto your chosen surface.

4. Fixing the Mount




Reverse Step 1 by attaching the top half of the mount to the bottom half and secure back into place.

Note: The Tilt Mount is supplied with wall plugs and corresponding screws for fitting to a surface.

Stand


If you purchased the Tablet with a Stand, you will receive it with either a standard or weighted base.

1. Fitting the Stand




First put 3 Screws through the bottom of the floor stand and screw-in through the Tablet pole

2. Fitting the Tablet



To fix the mount to your Tablet, fit in 4 screws.

3. Hiding the Power Cable



To hide the power cable, thread it through the holes shown in the demonstration above.

Technical Information

Weight	0.7Kg
Dimensions	260 x 23 x 178mm
Processor	RK3288 2Ghz
Internal Storage	12GB
Memory	RAM 2GB
Operating System	Android 7.1 (Nougat)
Touchscreen	Touchscreen 10-Point Capacitive Touch
Display	10.1" IPS Panel, Display Area: 215 x 135mm, Aspect Ratio: 16:10
Screen Resolution	1280 x 800
Brightness and Contrast	300 cdm ² , 800:1
Network	WiFi 802.11b/g/n/, RJ45 – Ethernet, Bluetooth 4.0, Supports External USB 3G/4G Dongle
External Connections	2 x USB2.0, 1 x Mini USB
SD Card	Card slot supports up to 32GB (Card not supplied)
Audio Output	Standard 3.5mm Stereo Audio Jack
Power Input	1x5.5mm Power DC 5V2A Jack
Camera	2.0MP
Operating Temperature	0°C to 35°C
Speakers	2x2w Stereo Speakers
Mount	Tilt, Stand, Weighted Stand (7.7Kg Weight), Without
Security	Import Port Supplied with Cover Plate

Drawings not to scale




Technical drawing of the 21.5 inch monitor showing front, top, and side views with dimensions.

Front View: The monitor has a width of 218.50 mm and a height of 136.50 mm. The bezel width is 260.54 mm and the bezel height is 178.54 mm. The screen area is 130.27 mm wide and 104.42 mm high. The mounting bracket is 75 mm wide and 75 mm high. The mounting holes are 10.00 mm apart. The monitor has a VESA mounting pattern with four holes.




Top View: The monitor has a width of 218.50 mm and a height of 136.50 mm. The bezel width is 260.54 mm and the bezel height is 178.54 mm. The screen area is 130.27 mm wide and 104.42 mm high. The mounting bracket is 75 mm wide and 75 mm high. The mounting holes are 10.00 mm apart. The monitor has a VESA mounting pattern with four holes.

Side View: The monitor has a thickness of 25.50 mm. The mounting bracket is 10.00 mm high. The monitor has a VESA mounting pattern with four holes.

Tilt Mount



Stand

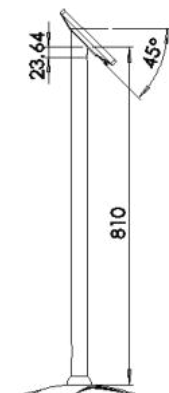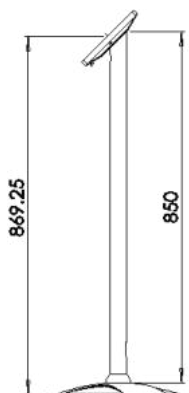

Stand with Weight

